

A: ADJUSTING THE SNOOT-PIECE

1. Open the plastic clip for easier placement of the muzzle.



2. Adjust the snout-piece circumference. In addition to adjusting the strap, you might have to move the metal adjustment buckle itself. Use a sturdy, pointy object, such as a knitting needle or a pencil, for loosening the strap, if needed. Do not use anything, that could damage the strap (e.g. a knife)!



Images below show the snout piece at loosest (image A) and tightest (image B) setting. Pay attention to the location of the metal adjustment buckles and the way the strap runs through them.



A



B

3. Test the circumference of the snout-piece on your dog. You might have to repeat the adjusting and testing until you get a tight and comfortable fit. Make sure it is not too tight!




4) If you have any excess strap on the snout piece, you can secure it with velcro straps on top of the snout.



B: FITTING THE NECK STRAP

1. Adjust the neck strap circumference. In addition to adjusting the strap, you might have to move the metal adjustment buckle itself. Use a sturdy, pointy object, such as a knitting needle or a pencil, for loosening the strap, if needed. Do not use anything, that could damage the strap (e.g. a knife)!

Images below show the neck strap at loosest (image A) and tightest (image B) setting. Pay attention to the location of the metal adjustment buckles and the way the strap runs through them.

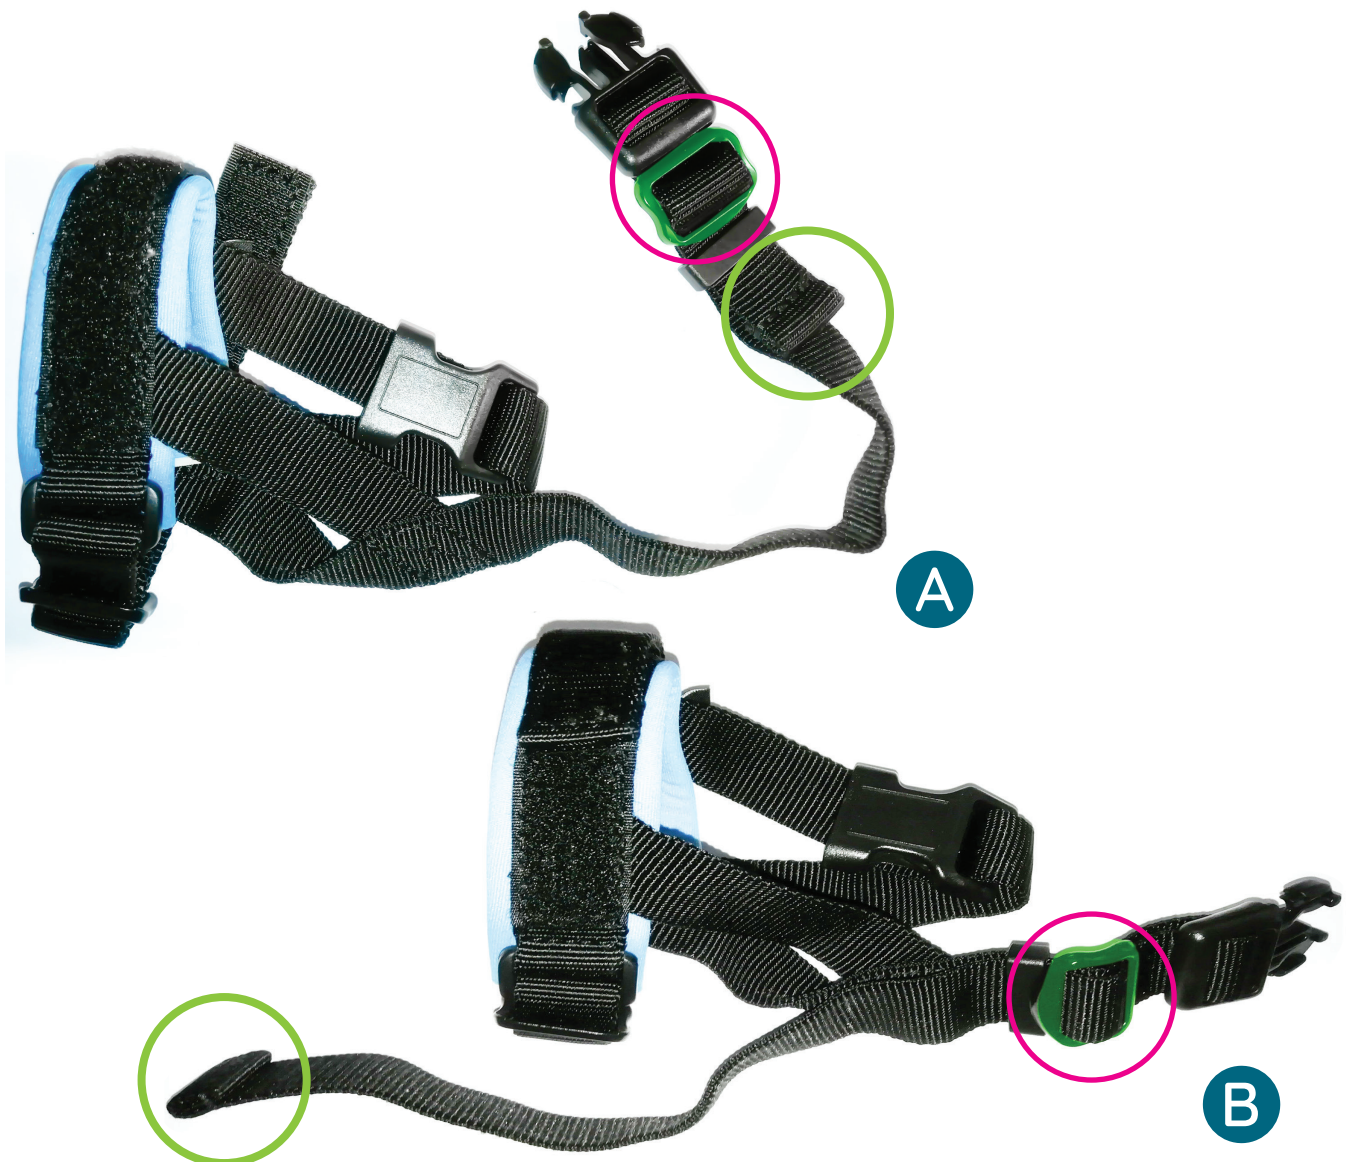

3) Test the circumference of the neck strap on your dog. You might have to repeat the adjusting and testing until you get a tight and comfortable fit. Make sure it is not too tight!



4) If you have any excess neck strap and will not be adjusting the muzzle to a looser setting in the future (e.g while your puppy grows/for using it on another, bigger dog) you can cut the excess strap. Make sure you leave some strap for minor adjustments in the future.



In order to prevent fraying, seal the end of the cut strap by heating it over a flame: a candle or a lighter will do.

Bear in mind that if the end is not fully sealed, a strap that has been cut may eventually start fraying.